

## STRION® LED/ STRION® LED HP

### HIGH PERFORMANCE RECHARGEABLE FLASHLIGHT

**MARKET**
**APPLICATIONS:** Premium Professional Light - Law Enforcement, Industrial, Security, Outdoor, Consumer

**DESCRIPTION:**

Ultra compact & powerful, the Strion® LED and Strion® LED HP rechargeable flashlights offer 3 microprocessor controlled variable intensity modes, strobe mode and the latest in power LED technology. The combination of rechargeable batteries and the C4® LED results in one of the lowest operating costs of any flashlight made.

**CASE MATERIAL:**

6000 series machined aircraft aluminum with anodized finish. Available in Black.

**DIMENSIONS:**
**Strion® LED:**

Length: 5.90 in. (14.99 cm)  
 Head Diameter: 1.25 in. (3.18 cm)  
 Barrel Diameter: 0.95 in. (2.41 cm)  
 Diameter at Tri-Lobe Anti-Roll Flange: 1.44 in. (3.66 cm)

**Strion® LED HP:**

Length: 7.00 in (17.78 cm)  
 Major Diameter: 2.20 in. (5.59 cm)  
 Barrel Diameter: 0.95 in. (2.41 cm)

**WEIGHT:**

**Strion® LED:** 5.2 oz (148 grams) with battery

**Strion® LED HP:** 7.1 oz (202 grams) with battery

**LENS:**

**Strion® LED:** Borofloat High Temperature Glass. Gasket sealed.

**Strion® LED HP:** Unbreakable polycarbonate lens with scratch-resistant coating. O-ring sealed.

**LIGHT SOURCE:**

C4® LED technology, impervious to shock with a 50,000 hour lifetime.

**LIGHT OUTPUT:**

See charts for specific model. Optimized electronics provides regulated intensity.

**ON/OFF:**

Multi-function, push-button tactical tailswitch. One handed operation of momentary, variable intensity or strobe mode.

**RUN TIME:**

See charts for specific model. All claims to 10% of initial lumen output. Strobe: 5.5 continuous hours.

**BATTERY:**

Lithium Ion with on-board safety control circuit, 3.75V, 2000mAh minimum, rechargeable up to 500 times.

**CHARGING:**

Fits existing Strion® chargers.

Clamp style charge holder with digital control circuit that prevents overcharge.

Fully recharges battery in 3 hours and charges battery in product.

Charge base LED indication: LED Steady - Charging; LED Blinking - Charged.

**FEATURES:**


C4® LED technology for extreme brightness.

IPX4 rated design; water resistant operation.

2 meter impact resistance tested.

LED Charge-continuity indicator on charger base.

Compact, snap-in charger mounts in any position.

Serialized for positive identification.

**WARRANTY:**

Streamlight warrants this product to be free of defect, including the LED, for a lifetime of use. We will repair, replace or refund the purchase price, at our option, of any Streamlight product that does not work as a result of a manufacturing defect for as long as you own it. This limited lifetime warranty excludes abuse, batteries, chargers, switches and electronics. Rechargeable batteries, chargers, switches and electronics have a two (2) year warranty with proof of purchase.









**APPROVALS:**


Meets applicable European Community directives. 

**OPTIONAL**
**ACCESSORIES:**

**Strion® LED:** Color Filters, Safety Wands, Holster, Rail Mount.

**Strion® LED HP:** Safety Wands, Holster, Rail Mount.

	Strion® LED				Strion® LED HP			
	FL1 STANDARD	HIGH	MEDIUM	LOW	FL1 STANDARD	HIGH	MEDIUM	LOW
OUTPUT		160 LUMENS	80 LUMENS	40 LUMENS		160 LUMENS	80 LUMENS	40 LUMENS
RUNTIME		2h	4h	7h 30min		2h	4h	7h 30min
DISTANCE		200m	141m	100m		390m	283m	200m
INTENSITY		10,000cd	5,000cd	2,500cd		38000 cd	20000cd	10000cd

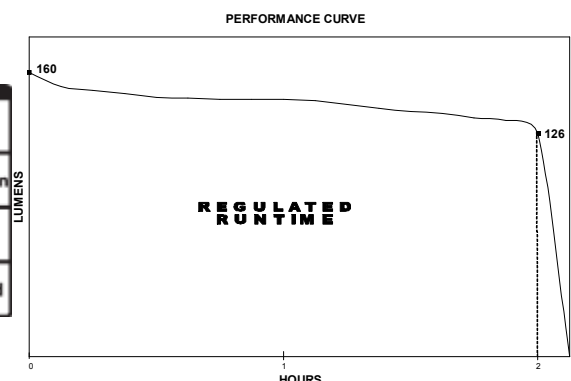

All performance claims tested to ANSI/NEMA FL1-2009 Standard

Issued: 10/27/08

Revised: 12/03/10 Rev: 4

**Assembled In The USA.**

Document #245