



ELECTRO-OPTICS - RED DOT

ROMEO-X ENCLOSED PRO

PISTOL-MOUNTED REFLEX SIGHT



Fits: Fits P320 and, All DeltaPoint® PRO Footprints




Fully Enclosed, Sealed, and Argon-Purged Optical System



Rugged 7075 Aluminum Housing For Superior Durability



Low Deck Height For Standard-Height Iron Sight Co-Witness

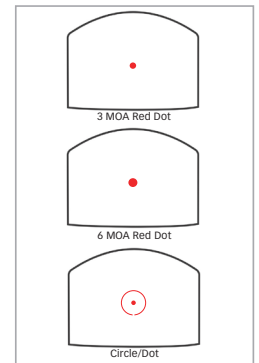

Available Reticles: 3 MOA Red Dot, 6 MOA Red Dot or Circle/Dot

ROMEO-X ENCLOSED PRO

PISTOL-MOUNTED REFLEX SIGHT

SORX1300 | SORX1330 | SORX1360

SKU#:

SORX1300 | SORX1330 | SORX1360

UPC:

798681702107 | 798681699360 | 798681699377

- ▶ Inspired by MIL-SPEC ROMEO-M17
- ▶ Rugged 7075 Aluminum Housing with a Fully Enclosed, Sealed, and Argon-Purged Optical System
- ▶ Patent-Pending Beryllium Copper Flexure Arm
- ▶ Distortion Free Aspherical Lens
- ▶ MOTAC (Motion Activated Illumination)
- ▶ Available Reticles: 3 MOA Red Dot, 6 MOA Red Dot, or Circle/Dot
- ▶ Low Deck Height for Standard-Height Iron Sight Co-Witness
- ▶ 20,000 Hour Battery Life With Side Load Battery
- ▶ 15 Illumination Settings Including 3 Night Vision
- ▶ Assembled in U.S.A.



ELECTRO-OPTICS - RED DOT

ROMEO-X ENCLOSED PRO

PISTOL-MOUNTED REFLEX SIGHT

PRODUCT DETAILS

SKU#	SORX1300 SORX1330 SORX1360	
HOUSING MATERIAL	7075 ALUMINUM	
HOUSING FINISH	BLACK	
CLEAR APERTURE DIAMETER (MEASURED DIAGONALLY)	24 MM	
LENS MATERIAL	GLASS	
LENS TYPE	ASPHERE	
BATTERY TYPE	CR1632	
BATTERY LOCATION	SIDE	
BATTERY ACCESS	SLOTTED AND KNURLLED CAP	
BATTERY LIFE IN HOURS AT MEDIUM SETTING (CONSTANT ON)	20,000	
EMITTER TYPE	HIGH-EFFICIENCY POINT SOURCE LED	
WINDAGE ADJUSTMENT RANGE	70 MOA	
ELEVATION ADJUSTMENT RANGE	65 MOA	
ADJUSTMENT RESOLUTION PER CLICK	1.0 MOA	
ADJUSTMENT SCREW TYPE	T6 TORX	
TACTILE ADJUSTMENT CLICKS	YES	
BRIGHTNESS ADJUSTMENT SETTINGS	15 (12 DAY / 3 NV)	
RETICLE	3 MOA RED DOT, 6 MOA RED DOT, RED CIRCLE/DOT	
WATER RESISTANCE	IPX-7	
MOUNTING FOOTPRINT	DeltaPoint® Pro	
ASSEMBLED IN	USA	
MEASUREMENTS	IMPERIAL	METRIC
OVERALL LENGTH	1.83 in	46.48 mm
OVERALL HEIGHT	.94 in	23.88 mm
OVERALL WIDTH	1.23 in	31.24 mm
WEIGHT W/ BATTERY	1.2 oz	34.02 g



SORX1300 | CIRCLE/DOT



SORX1330 | 3 MOA RED DOT



SORX1360 | 6 MOA RED DOT



SIGSAUER®